


Maximum capacity 120 kg, up to 4.2 meters in height For lifting roof or facade glass

The CA 400 glass lifter has been designed to facilitate the installation of glass in verandas, or on roofs and facades. It is a portable device, usable immediately, without the use of any equipment.

Model	Load allowed with 80°	Angle Height of lifting (*)	Dimensions with closed feet	Dimensions with open feet	Weight	Support glass
CA 400	150 kg a 4 mt	4 mt	550 x 660 mm	980 x 1010 mm 1590 x 750 mm (**)	66 kg	20 kg

(*) = supporto vetri orizzontale (**) = per lavori in facciata

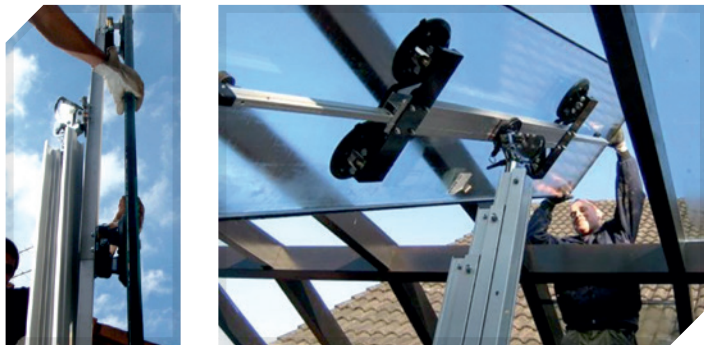

È COSTITUITO DA SOLI TRE ELEMENTI:

- ▶ Motorized Lift mast
- ▶ Glass support (optional)
- ▶ Counterweight (only if working on the facade)

STRUCTURE

- Anti-torsion sliding guides
- Four adjustable feet, with braked wheels that allow their use even on sloping ground
- Easily transportable to the construction site thanks to the 4 wheels and the handle

ENGINE

- 230V - 50/60 Hz single-phase motor with speed variator, which makes perfect positioning of the loads (for example glass sheets)
- Can also be used manually in the event of a power failure
- Ergonomic control joystick with reverse gear and belt clip
- Automatic torque limiter which, in case of overload, stops lifting
- Emergency stop, located on the engine block for user safety

GLASS SUPPORT (OPTIONAL)

- Pump safety suction cups with steel and brass body, Ø 200 mm. TÜV unit capacity of 65 kg, safety factor 2, with indicator.
- The lift head allows horizontal or vertical adjustment up to 90°
- 4 suction cups + 2 sliding arms for glass sizes up to 4mt.

Technical features


ADJUSTABLE FEET

When working on the facade, place the counterweights on the rear of the machine for greater stability.




TRANSPORT


Foldable, ease of its mobility

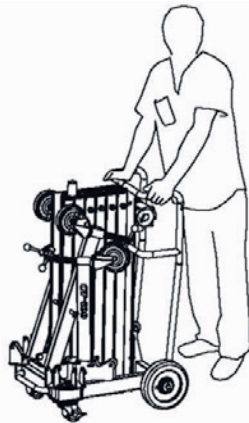


ACCESSORIES



Standard platform
750x450mm



Extension cords
platform



Support
for glasses



Glass suction
cups up to 180kg



Support 4
suckers with arms

Electrical lifter CA 400

